


EASYSOVE

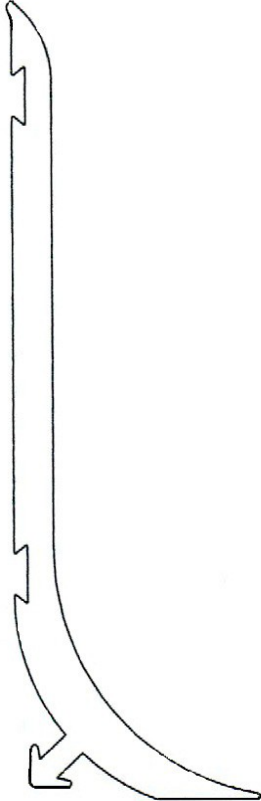

Easycove® cove base moldings, pre-formed with a patented watertight design, specifically geared for the floor and wall coatings industry.

A highly engineered cove base, the cove is easily coated and provides numerous benefits over traditional hand troweled and existing cove moldings currently available.

Easycove® Coving Advantages

A patented design with interlocking technology, protects against moisture intrusion to dry wall, CMU, and other porous surfaces where associated hazards such as mold and mildew can occur.

Easycove® coving is manufactured to have an expansion coefficient, similar to epoxy. This feature helps to eliminate cracking and separation between dissimilar materials under thermal cycling conditions.

Easycove® coving allows for greater installation convenience, as it can be mitered to accommodate inside or outside angles without the need for expensive pre-formed corners.

Easycove® COVING BENEFITS

BOND STRENGTH

Superior bond to substrate when using our adhesive.

COVE ANCHOR

Can be used in wet environments due to patented design.

FIRE RESISTANT

Will not support combustion.

CUSTOMIZABLE

Can be custom made to any length, color and/or pre-coated.

PRODUCT OPTIONS:

- 4" and 6" tall Radius Cove Base
- Actual height: 4", 6"
- Cove radius: 1"+
- Cove Base wall thickness: nominal 1/4"
- Length: 48"
- Total distance out from wall: 1 1/4"
- Weight: approx. 0.70 lbs/ft and 0.95 lbs/ft
- Cove base: fifteen 4' pieces/box, totaling 60'/box; one 4" box = 34 lbs and one 6" box = 49lbs

Easycove®

872 S. Milwaukee, Ave., Suite 234
Libertyville, IL 60048

PHONE

847-972-2131

WEB

Easycove.com