EASYCOVE®

BETTER BY DESIGN™

Easycove® cove base moldings are pre-formed with a patented watertight design, specifically geared for the floor and wall coatings industry.

A uniquely engineered cove base, the cove is easily coated and provides numerous benefits over traditional hand troweled and existing cove moldings currently available.

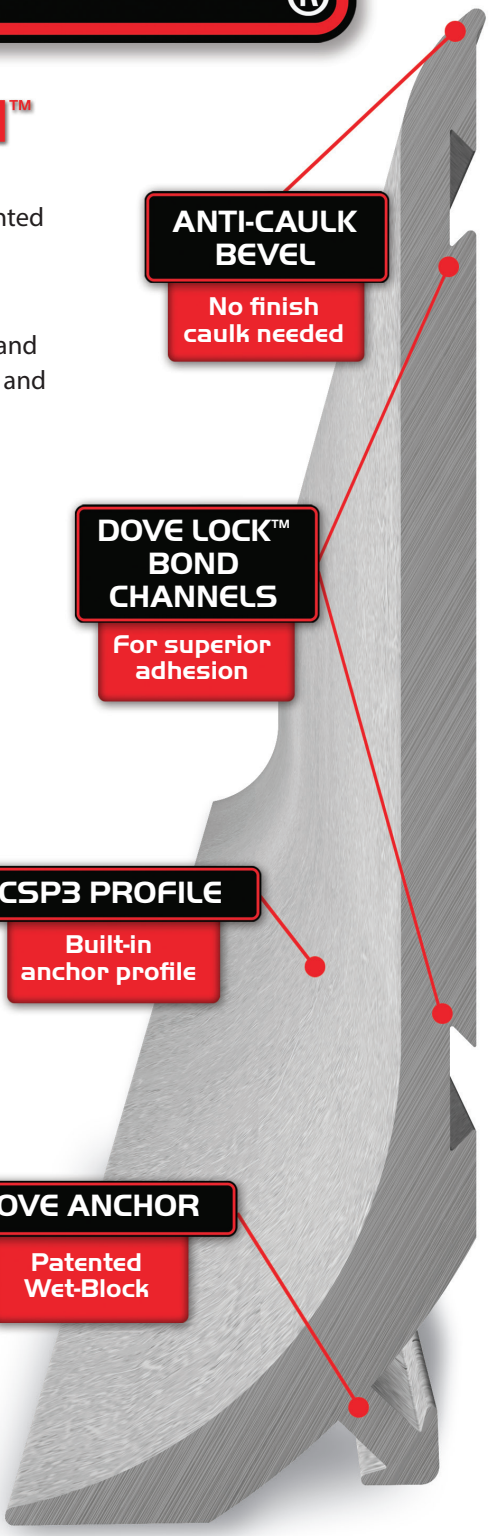

- **MOISTURE LOCK-OUT**
  A patented design with interlocking technology, protects against moisture intrusion to dry wall, CMU, and other porous surfaces where associated hazards such as mold and mildew can occur.

- **NO SEPARATION ANXIETY**
  Easycove® coving is manufactured to have an expansion coefficient, similar to polymer coatings. This feature helps to eliminate cracking and separation between dissimilar materials under thermal cycling conditions.

- **TURNING A CORNER**
  Easycove® coving allows for greater installation convenience, as it can be mitered to accommodate inside or outside angles without the need for pre-formed corners. (Pre-formed corners available)

- **MORE GREAT NEWS**

Self-extinguishing - will not support combustion
3 Sizes: 1", 4" and 6" tall radius cove base
Cove radius: 1"+ Length: 48"
Cove Base wall thickness: nominal ¼"
Total distance out from wall: 1-¼"
Weight: approx. 0.70 lbs/ft and 0.95 lbs/ft
Cove base: 60 LF 4' pieces/box, totaling 60'/ box;
One 4" box = 45 lbs and one 6" box = 75 lbs

Ensure a superior bond using the Mapei Ultrabond ECO 907 adhesive!